



## **GB2 100W DC/DC Converters**



## CONTENTS

1. INTRODUCTION
2. ELECTRICAL SPECIFICATION
  - 2.1 Input
  - 2.2 Output
  - 2.3 Environmental factors
  - 2.4 Isolation
  - 2.5 Mechanical
  - 2.6 GB2 output options
3. MECHANICAL SPECIFICATION
  - 3.1 Mechanical outline

### Important Notice and Disclaimer:

*Snaptec Australia* reserves the right to make changes to their products or to discontinue any product without notice, and advise customers to obtain and verify the latest information prior to ordering.

*Snaptec Australia* products are not designed, authorized, or warranted to be suitable for use in life-support application or systems or other critical application. Inclusion of products from *Snaptec Australia* in such applications is understood to be fully at the customer's risk.



## **1. INTRODUCTION**

**The *GB2100W DC/DC converter* is a highly integrated DC/DC converter designed for Railway application. The input stage of these converters are designed in accordance to EN50155, with wide input window, additional surge protection, as well as EMC harden. Different output voltages are available. The full encapsulation of these converters provide ultimate moisture and shock protection. The GB2 series also use a patented startup circuitry to enhance startup of high surge load.**

**The unit is encapsulated into an aluminium U-channel as the heatsink surface for the converter. Utilising the latest planar magnetic and high integration ceramic technology, the unit footprint is measured only 90x150mm, with the total height of 22mm.**

**Input and Output to the unit are via 5mm pluggable screw-lock terminal blocks. A green LED indicates the present of output voltage. Output voltage is factory set to the initial accuracy of 0.5%.**

**Maximum operating ambient temperature of the unit is 60°C without derating (50°C for 5V model). The maximum surface temperature rise of the heatsink would be around 40°C (50°C for 5V model) above ambient. (Direct skin contact with the heatsink surface should be avoided.)**

**The module has an internal shunting device for input surge and reverse polarity protection. In order for these protections to function correctly and also to avoid fire risk, the unit must be connected with an external fuse. Recommended fuse rating for different models are in Sec. 2.**



## 2. ELECTRICAL SPECIFICATION

### 2.1 Input

Parameter	min	typ	max	unit
<b>Input</b>				
Voltage range	77		138	V <sub>dc</sub>
Abnormal input voltage (10s) <i>output regulation maintained</i>	65		154	V <sub>dc</sub>
Input current (max @ 65Vdc)			2.2	A
External input fuse	2.5~3A F			
Reverse polarity protection	Blow input fuse. Internal clamp with no damage to unit.			
Input surge/transient protection	EN50155 & ENV50121-3-2.			
Input startup voltage		62		V <sub>dc</sub>
Input shutdown voltage		50		V <sub>dc</sub>

### 2.2 Output

Parameter	min	typ	max	unit
<b>OUTPUT</b>				
Setup accuracy (V <sub>nom</sub> )	99.5		100.5	% V <sub>nominal</sub>
Rated Current (I <sub>rated</sub> )	See table 2.6			



<b>Load regulation</b> (0A to $I_{rated}$ ) (5V model)		<b>0.1</b>	<b>0.25</b> 0.5)	$\pm\% V_{nominal}$
<b>Line regulation</b> (full input range)		<b>0.1</b>	<b>0.25</b>	$\pm\% V_{nominal}$
<b>Output noise: switching frequency ripple</b> <b>high frequency spike (30MHz BW)</b> Note: Measured at the output connector with 100n ceramic decoupling capacitor across output.			<b>0.25</b> <b>0.5</b>	$\pm\% V_{nominal}$ $\pm\% V_{nominal}$
<b>Current limit</b>	<b>105</b>	<b>115</b>	<b>135</b>	$\pm\% I_{rated}$
<b>Overload protection</b>	Trip and restart, approx. 0.3s on, 3s off.			
<b>Efficiency at full load (model dependent)</b>		<b>89</b>		<b>%</b>
<b>Overvoltage protection</b> (unit latching, reset by recycle input power)	<b>120</b>	<b>125</b>	<b>130</b>	$\pm\% V_{nominal}$



### 2.3 Environmental factors

Parameter	min	typ	max	unit
Operating Ambient temperature (5V model)	-20		+60 +50)	°C
Cooling	Natural Convection cooling			
Thermal shutdown (Unit shutdown and automatic recover after overtemperature condition subside.)		105		°C <sub>chassis</sub>
Operating Orientation	Stand-alone unit. No special orientation.			
Humidity			95	%
Altitude			7700	metres
Shock & vibration (Design to meet)	MIL-STD 810E & IEC61373			
Electrostatic Discharge immunity:	Design to meet IEC61000-4-2: 4KV			
MTBF (G <sub>m</sub> , T <sub>amb</sub> =25°C)	260Khours (estimated)			
INTERFACE				
Input	3 way pluggable screw-lock 5mm terminal block			
Output	4 way pluggable screw-lock 5mm terminal block			
Indication: DCOK (Output)	Green LED on chassis (output face)			



## 2.4 Isolation

ISOLATION				
<b>Input to Output</b>	<b>1000</b>	<b>(2KV 1second)</b>		<b>Vdc</b>
<b>Input to chassis</b>	<b>1000</b>	<b>(2KV 1second)</b>		<b>Vdc</b>
<b>Output to Chassis</b>	<b>500</b>			<b>Vdc</b>

## 2.5 Mechanical

MECHANICAL	
<b>Outside dimension</b>	<b>90x150x22mm</b>
<b>Casing</b>	<b>Aluminium with Black anodisation.</b>
<b>Weight</b>	<b>1.0Kg max</b>


## 2.6 GB2 Series 100W output options

<b>OUTPUT V</b>	<b>5V</b>	<b>12V</b>	<b>13.7V (C12V)</b>	<b>24V</b>	<b>27.4V (C24V)</b>
<b>INPUT V</b>					
<b>110V</b>	<b>20A</b>	<b>8.3A</b>	<b>7.2A</b>	<b>4.2A</b>	<b>3.6A</b>

Note: Both terminals on the output connector should be used for connection to reduce voltage drop associated with contact resistance, especially on high current model.



**Order Number: GB2-110-XX XX-output voltage eg. C12 for 13.7V output**

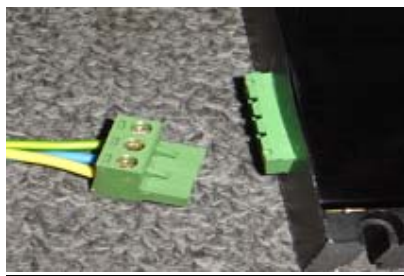

### 3. MECHANICAL SPECIFICATION

#### 3.1 Mechanical outline

