

SVM2-1248-C

Features

- Suitable for DC input options: 12V, 24V & 48VDC systems
- Two alarms with LED
- Alarms available via relay change over contacts
- Each alarm can be set to monitor any under voltage condition between 10.5 ~ 60VDC
- Screw terminals connection
- Suitable for a wide range of industrial applications
- Case dimensions : 125 x 57 x 32mm
- Contact rating: 30vdc 0.5A

General Specifications

Input Voltage	Input A 10.5V ~ 60VDC Input B. 10.5V ~60VDC
Output	Two Relay Alarms
Alarm Setting	Each alarm is adjustable for use with 12V, 24V or 48VDC power supply applications.
Adjustment	Alarm A (10.5V ~ 60VDC) Alarm B. (10.5V ~ 60VDC) The two Alarms have individual trim-pots, allowing the voltage level to be set as indicated above.

Description

The **SVM2-1248** was developed to provide an off-the-shelf solution for monitoring 12, 24 and 48VDC power supply systems.

It will accept two DC Input supplies and will provide two isolated alarms, which can be set for monitoring an under voltage condition or DC Fail condition of a DC Supply or Converter.

Each setting is also adjustable via a trim pot to the required voltage to be monitored.

The two LED'S also provide visual indication of DC Fail / Low condition.

Typical applications include the monitoring of any DC Power supply, in particular the monitoring of two power supplies that are connected in an **N+1 redundancy** (via external diodes)

It can also be used in battery back-up systems, with alarm **A** for example used to monitor the float voltage of the system and alarm **B** used to monitor a low level, such as battery low condition.

Input A +VE In -VE In	ALARM PCB	Output Contacts NC Com NO
Input B +VE In -VE In		Output Contacts NC Com NO

Fig 2: Alarm card connections

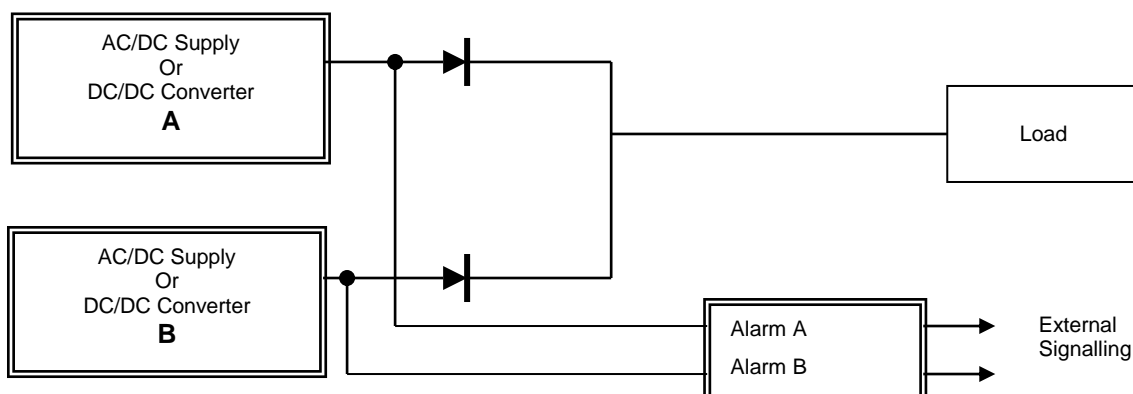


Fig 1: Typical connection diagram with two power supplies connected in N+1 redundancy