


CBI2501224A ALL In One

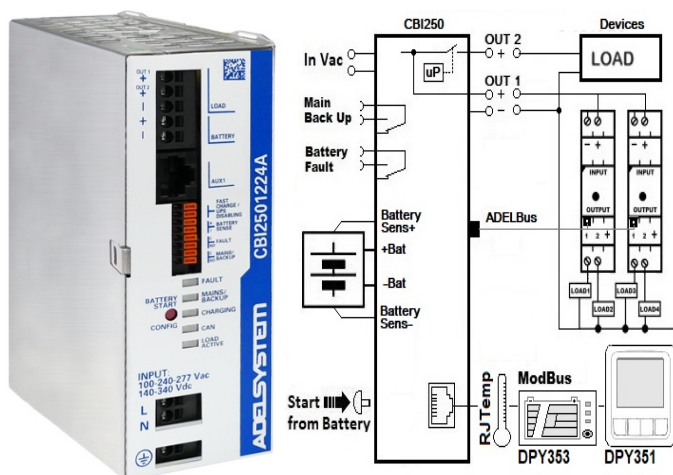

- Input: Single-phase 100 – 240 - 277 Vac / 140 – 340 Vdc
- Output Selectable Load: 12 Vdc 10A; 24 Vdc 10A
- Two output: 1 Continuous, 1 Dynamic: On/Off by Modbus
- Output Battery charging: 12 Vdc 10A; 24 Vdc 10A
- Two load outputs: one static; one dynamic for: On/Off, Dimmer (LED, DC brush motors), Fuse Breaker, PC shutdown and more
- Modbus RTU for Monitoring, Configuration, History and Alarms.
- ADELBUS: integrated monitoring and control of ADELSYSTEM devices such as MRF10x e-Fuses and display.
- Suitable for the following battery types: Open Lead Acid, Sealed Lead Acid (AGM/VRLA), lead Gel, Li-Ion and NiCd/NiMH
- Battery Care: Automatic diagnostic of battery state-of-charge (SoC) and state-of-health (SoH).
- Charging curve IUoU, constant voltage and constant current.
- Five charging levels: Recovery, Boost, Absorption, Float (Forced trickle / Forced float / Auto float-trickle), and Refresh
- Battery purification for battery reinvigoration
- Protected against short circuit and reversed polarity
- Signal output (contact free) for: discharged or damaged battery, Mains or Back-up, rectifier failure
- Protection degree IP20 - DIN rail; Space saving

Technical features

Thanks to the All-In-One units “DC-UPS” it is possible to optimize the power management, today implemented with two Outputs: one Dynamic and one Static. The available power is automatically shared between load and battery. Supplying power to the load is the top priority of the unit: it is not necessary to double the power of the device, because also the power going to the battery will be steered to the load if the load so requires. The maximum available current at the load output is twice the value of the device rated current In. We call “Battery Care” the concept based on algorithms that implement rapid and automatic charging, battery charging optimization during time, flat batteries recovery and real time diagnostic during installation and operation. Battery faults such as sulphated battery, battery cells in short circuit, accidental battery connection with reversed polarity, disconnection of the battery and more can easily be detected and removed with the aid of the blink code of the diagnosis LED both during the installation and normal operation. The continuous monitoring of the battery status reduces battery damage risk and allows a safe operation in a permanent and unattended system. The battery state-of-health is continuously monitored providing an early diagnostic of battery wear thus allowing a preventive maintenance to be undertaken. Each device is suited for all battery types: by means of the user interface it is possible to set predefined charging profiles for Open Lead Acid, Sealed Lead Acid, Gel, NiCd/NiMH with five charging stages, Recovery, Bulk/Boost, Absorption, multimode Float and Refresh, that can be customized by the user using the Modbus RTU interface. Periodic purification can be configured to regularly exercise the battery thus helping prevent sulphation and wear. A rugged casing with bracket for DIN rail mounting provides IP20 protection degree. The CBI250A is a feature-rich and heavy-duty unit which is extremely compact in size and very a cost-effective power management solution.

Power Management and controls


The new line CBI250 provide two Outputs: the first is a normal output connected to the internal power supply, the second output is controlled by the internal device and it is configurable, we call “Dynamic Output”. This Dynamic Output can be configured via Modbus RTU as Fuse Breaker, Soft Start, Fade-in and Fade-out, On/Off, PC shutdown and much more.

Interconnections

The CBI250 is equipped with a CAN-based ADELBUS interface which allows the plug-and-play connection of Adelsystem devices such as electronic fuses and displays enabling their control and monitoring. Moreover, an electrically-isolated RS485-based standard Modbus RTU interface allows a PC or RTU to monitor and control the CBI250 along with the ADELBUS devices connected to it. Such integration with all the accessories provided by ADELSYSTEM allows the development of a truly independent system for electrical continuity. At the same time, it allows monitoring and control all parameters in the system by means of application tools. ADELSYSTEM allows you to implement very simple but sophisticated monitoring and control for your energy system and opens your mind to new ways to approach your applications.

Norms and Certifications


- Compliance: EMC Directive 2014/30/UE and Low voltage Directive 2014/35/UE; EN IEC 62368-1; EN IEC 61000-6-2; EN IEC 61000-6-3; EN IEC 61000-6-4. EN54-4 Fire Detection and fire alarm systems and EN12101-10. EN54-4 Fire Detection and fire alarm systems and EN12101-10.

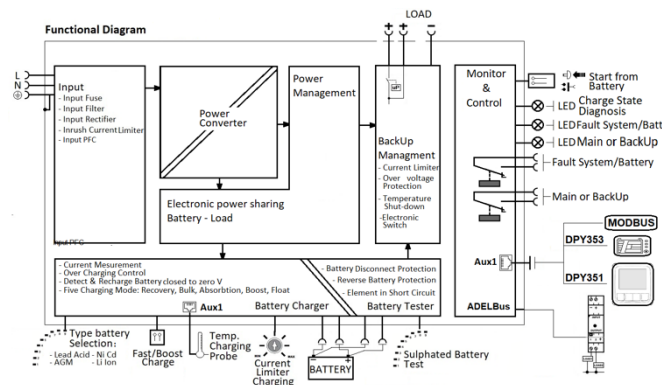

Input Data

AC Nominal Input Voltage	100 - 240 - 277 Vac
Input Current (at 100-240-277 Vac)	2 - 1.2 - 1 A
AC Input Voltage range	90 - 305 Vac
DC Input Voltage	140 - 340 Vdc
Input Current (at 140-340 Vdc)	1.5 - 0.9 A
Inrush Current (Vn – In nom. Load) I _{2t}	≤ 90 A (≤ 5 msec)
Power Factor, typ. at full load	> 0.95

Frequency	47 ÷ 63 Hz
Internal fuse (not replaceable)	8.0 A
External Fuse (recommended) MCB	10 A curve C
Output Data (internal power supply)	
Select Output Voltage 12 or 24 Vdc.	By push button or ADELViewSystem
Continuous current (without battery)	Iload=In
Continuous current (With battery) Iload= In+ Ibatt	2 x In
Max. current Output Load (Main + Battery) Iload (4 sec.)	3 x In max.
Max. current Output Load (Back Up) Iload (4 sec.)	2 x In max.
Start From Battery Without Mains (Remote Input Control)	External Contact / Push Button
Time Buffering; switch output off without main input. Setting By ADELViewSystem	0.5; 2.5; 10; 15; 20; 30; 45; 60; ∞
Efficiency 240 Vac 24Vdc (rated current)	≥ 92 %
Residual Ripple	≤ 80 mV _{pp}
Turn-On delay after applying mains voltage	1 sec. (max)
Start up with Strong Load (capacitive load)	Yes, Unlimited
Dissipation power load max (W)	< 20
Short-circuit protection	Yes
Over Load protection	Yes
Over Voltage Output protection	Yes (typ. 75 Vdc)
Overheating Thermal protection	Yes
Continuous Output Load 24 Vdc (Default)	
Output voltage (at In)	22 - 28.8 Vdc
Nominal current In = Iload (24 Vdc)	10 A ± 5% In
Bonus Power max 60 sec	13 A ± 5% In
Threshold alarm Battery almost flat	20 – 21 Vdc batt
Protections against total discharge	19 – 20 Vdc batt
Continuous Output Load 12 Vdc (Deep Switch selection)	
Output voltage (at In)	10 - 14.4 Vdc
Nominal current In = Iload	10 A ± 5% In
Bonus Power max 60 sec	13 A ± 5% In
Threshold alarm Battery almost flat	10 – 11 Vdc batt
Protection against total discharge	9 – 10 Vdc batt
Dynamic Load	
Output voltage follow the Output Load “Additional Output Switchable”	On/Off Max 10 A Can be drive by Modbus
Battery Output	
Boost-Fast charge Switch	Lead Acid: 2.40
Configuration 20°C (V/cell)	Ni-Cd:1.45; Li-ion: 3.65
Float Charge Switch Configuration 20°C (V/cell):	Lead Acid: 2.23; 2.25;2.27;2.30;Ni-Cd: 1.4 Ni-Mh:1.5; Li-ion: 3.45
Batteries for 24 Vdc	N°2 x 12V in series
Batteries for 12 Vdc	N°1 x 12V
Max.Time Boost–Bulk charge (Typ. at IN)	15 h
Min.Time Boost–Bulk charge (Typ. at IN)	1 min.
Charging current max Ibatt	In ± 5%
Charging current limiting Iadj	0.2 ÷ 100 % / Ibat
Recovery Charge 12V / 24Vdc	2–11.2V/2–22.5V
Reverse battery protection	Yes
Battery sulphation check	Yes
Detection of shorted cells	Yes
Battery sense input for 4-wire connection	Yes
Quiescent current on battery	≤ 5 mA
Charging Curve automatic: IUoU	5 stages
Remote Input Control (RTCONN cable)	Boost /Float

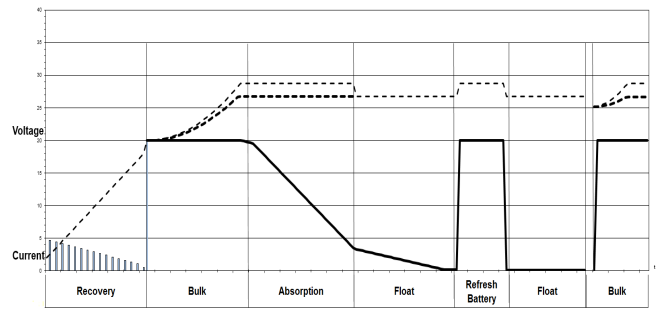

Battery Tester

Sulfated battery check (SoH)	Yes
Short circuit Element Detection	Yes
Refresh Battery (must enabled Fast Charge)	Every 288 hours
State of Charge (SoC)	Yes
Low Battery Capacity warning	Yes
Auto or manual test SoH	Yes

Type of Signal Output Contact (dry switch contacts)

Dry Contact. Current can be switched (EN60947.4.1): Max: DC1: 30 Vdc 1 A; AC1: 60 Vac 1A (Resistive load) Min: 1mA at 5 Vdc (Min permissive load)

Main or Backup Input Power	C	/	NO
Fault Battery or system	C	/	NO

(The Outputs can be reconfigured on the project Needs)

LED Indicator

Fault	Red
Mains or Back Up	Yellow
Charging / Diagnosis	Green /Red
ADELBUS (CAN)	Green
Load Active “ON”	Green

PC Shutdown or Device Shutdown

PC Shutdown function to switch Off and On PC	By ADELViewSystem and RJUSB280 Cable
Switch off device if Ethernet looses the communication	By setting the device.

UPS Disabling


Enabling / Disabling UPS	By outside contact
--------------------------	--------------------

Communication Port: Input / Output (RJ45)

Remote monitoring data Protocol Aux1 for:	Modbus RTU (RS485) DPY351 or DPY353 RJTemp
---	--


Climatic Data

Ambient temperature (operation)	-25 ÷ +70°C
De-rating T _{amb} > 50°C	- 2 % (In) /°C
Ambient temperature Storage	-40 ÷ +85°C
Humidity at 25 °C no condensation	95% to 25°C
Altitude: 0 - 6000m / 0 – 20000ft	No restrictions
Over voltage category IEC62103, EN50178	III Altitude < 2000m
Over voltage category IEC62103, EN50178	II Altitude > 2000m
Cooling	Auto convection

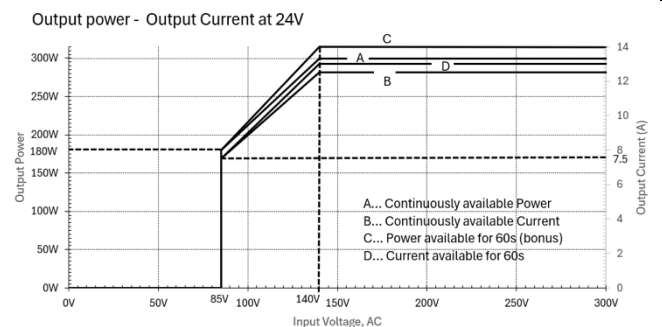

General Data

Insulation voltage (IN/OUT)	4000 Vac
Insulation voltage (Input / Earth, PE)	2500 Vac
Insulation voltage (Out Load & Battery / Earth, PE)	1000 Vac
Insulation voltage (Out Load & Battery / Fault System & Main or Back Up terminal)	1000 Vac
Modbus RTU interface insulation	Functional only
Leakage Current	< 5mA
Protection Class (EN/IEC 60529)	IP20
Reliability: MTBF IEC 61709	> 300000 h
Pollution Degree Environment	2
Input and output Connections: terminal Blocks Push-in type	2 mm (24–12AWG)
Signal Connections: terminal Blocks Push-in type	0.8 mm (24–20AWG)
Protection class (PE Connected)	I, with PE
Dimensions (w-h-d)	50x135x135 mm
Weight	0.95 kg

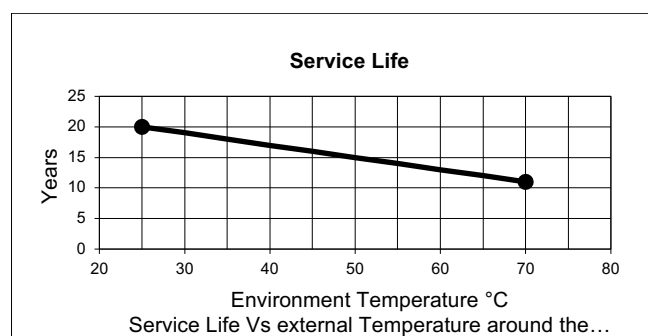

Accuracy Measurement

Accuracy on the Input side

Measure of the Main Input voltage at 47- 63Hz; $\pm 25^{\circ}\text{C}$; 90 – 305 Vac	$\pm 1\%$ of Full Scale Vac
--	--------------------------------

Accuracy on the output side

Measure of the Output voltage Load Side Range: 10 – 66 Vdc	$\pm 1.5\%$ of Full Scale Vdc Out
Measure of the Output current Load Side Range: 0 -40 A	$\pm 1.5\%$ of Full Scale I Out
Measure of the Output voltage Battery Side Range: 0 – 66 V	$\pm 1.5\%$ of Full Scale Vdc Out
Measure of the Output current Battery Side Range: 0 – 20 A	$\pm 1.5\%$ of Full Scale I Out
Temperature Probe Range: -20 – 60°C	$\pm 2^{\circ}\text{C}$

Accessory

RJTEMP451N	Temperature Probe Length 1m.
RJTEMP453N	Temperature Probe Length 3m.
RJCONN45	Cable RJ45/RJ45 for Parallel Connection
DPYCONN250	Cable RJ45/RJ45 for DPY351 connection
RJ45COUPLER	RJ45 Three way "Daisy Chain" for Aux 2
RJUSB280-1	Cable RJ45/USB (Aux2) Length 1m for PC connection
RJTB280	Connector RJ45/Terminal Block 4pin for Aux 1 To RS485 ModBus RTU
ADELViewsistem (Aux1 RTU485)	PC App for: Monitoring, Logging, Configuration, Control, Alarm, of the devices in ADELBUS network.
DPY351	HMI panel control for: Monitoring, Logging, Configuration, Control, Alarm, of the devices in ADELBUS network.
DPY353	Display for: Monitoring the Battery state, Battery Charging Section.