
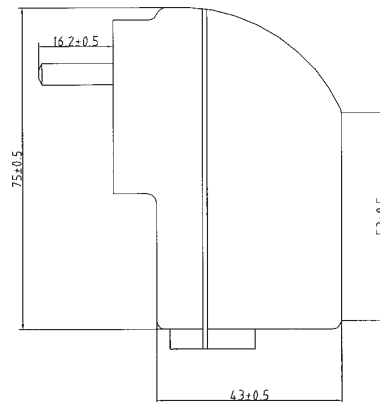


**SPP1298-W2A 3-24 watt Wall Plug Adapter**

AC Input Voltage: 90~264 Vac  
 AC Input Current: 0.5A RMS  
 AC Inrush Current: 30 Amps  
 Load Regulation: +/-5%  
 Min. O/P Amps: 0A  
 Operation Temperature: 0-40°C  
 Storage Temperature: -10 to +60°C  
 Protection: Short, Over Voltage, Over Current  
 MTBF: 35 000 Hours  
 DC Cable: 1.4 mts  
 EMC: EN50081-1, EN50082-1  
 Dielectric Withstand: AC I/P to O/P 3000v  
 Relative Humidity: 10-80% Operating  
 Relative Humidity : 10-90% Storage  
 Efficiency: 80%  
 Hold Up Time: 10 ms  
 Safety: GS/TUV, CB, CE, BSMI  
 Weight: 158 grams  
 Dimension: 75 mm (L), 34 mm (W), 43 mm (H)

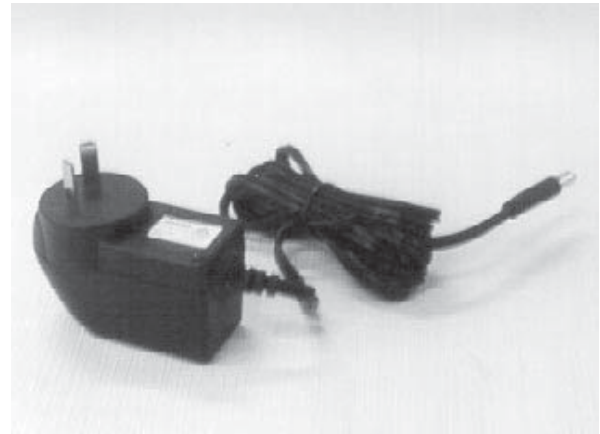

PART NUMBER	POWER RATING (Watts)	O/P VOLTS	O/P I (A)	Additional Safety	DC Plug Size	DC Plug Type
SPP 1298-0303-W2A	3.3	3.3	1			
SPP 1298-0312-W2A	3	12	0.25			
SPP 1298-0315-W2A	3	15	0.2			
SPP 1298-0503-W2A	5	3	1.5			
SPP 1298-0505-W2A	5	5	1			
SPP 1298-0509-W2A	5	9	0.6			
SPP 1298-0605-W2A	6	5	1.2			
SPP 1298-0606-W2A	6	6	1			
SPP 1298-0609-W2A	6	9	0.67			
SPP 1298-0610-W2A	6	10	0.6			
SPP 1298-0612-W2A	6	12	0.5			
SPP 1298-0615-W2A	6	15	0.4			
SPP 1298-0805-W2A	8	5	1.6			
SPP 1298-0806-W2A	8	6	1.33			
SPP 1298-0808-W2A	8	8	1			
SPP 1298-0815-W2A	8	15	0.5			
SPP 1298-0903-W2A	9	3	3			
SPP 1298-0906-W2A	9	6	1.5			
SPP 1298-0909-W2A	9	9	1			

# SPP SERIES



SPP 1298-0918-W2A	9	18	0.5			
SPP 1298-1005-W2A	10	5	2			
SPP 1298-1010-W2A	10	10	1			
SPP 1298-1012-W2A	10	12	0.8			
SPP 1298-1015-W2A	10	15	0.63			
SPP 1298-1206-W2A	12	6	2			
SPP 1298-1209-W2A	12	9	1.33			
SPP 1298-1212-W2A	12	12	1			
SPP 1298-1305-W2A	13	5	2.6			
SPP 1298-1505-W2A	15	5	3			
SPP 1298-1505-W2A	15	5	3			
SPP 1298-1506-W2A	15	6	2.5			
SPP 1298-1509-W2A	15	9	1.7			
SPP 1298-1512-W2A	15	12	1.25			
SPP 1298-1515-W2A	15	15	1			
SPP 1298-1518-W2A	15	18	0.85			
SPP 1298-1812-W2A	18	12	1.5			
SPP 1298-1815-W2A	18	15	1.2			
SPP 1298-1818-W2A	18	18	1			
SPP 1298-1824-W2A	18	24	0.75			
SPP 1298-2412H-W2A	24	12	2			