

### KEY FEATURES

- IP65 Design for Indoor or LED Outdoor Installations
- Universal Input: 90-305 VAC or 120-430 VDC
- Built-in Active PFC Function
- Free Air Convection
- High Reliability
- With Constant Current & Constant Voltage
- Output Voltage and Constant Current Level can Be Adjusted Through Internal Potential Meter
- LED Power Application



# IP65 CE


### ELECTRICAL SPECIFICATIONS

Model No.	ALF100-12S	ALF100-24S	ALF100-36S	ALF100-48S	ALF100-54S
Max Output Wattage (W)	100W				
Input	Voltage				
	90-305 VAC or 120-430 VDC				
	Frequency (Hz)				
	47-63 Hz				
	Current (Full load)				
	1.5 A max. (115 VAC) / 0.7 A max. (230 VAC) / 0.6 A max. (277 VAC)				
Output	Inrush Current (<2ms)				
	40 A max. (115 VAC) / 60 A max. (230 VAC)				
	Leakage Current				
	<0.75 mA max.				
	Power Factor				
	PF>0.97 (115 VAC) / PF>0.9 (230 VAC) at Full Load				
	Voltage (V.DC.)				
	12V	24V	36V	48V	54V
	Constant Current Range (V.DC.)				
	6 ~ 12V	12 ~ 24V	18 ~ 36V	24 ~ 48V	27 ~ 54V
	Voltage Accuracy				
	±2%				
	Current (Convection) (mA) max				
	8333	4166	2777	2083	1852
Current ADJ Range (mA)					
4166 ~ 8333	2083 ~ 4166	1388 ~ 2777	1041 ~ 2083	926 ~ 1852	
Voltage ADJ Range (V.DC.)					
10.8 ~ 13.2V	21.6 ~ 26.4V	32.4 ~ 39.6V	43.2 ~ 50.4V	48.6 ~ 56.7V	
Line Regulation					
±1%					
Load Regulation					
±1%					
Minimum Load					
0%					
Maximum Capacitive Load					
100,000 uF	50,000 uF	8,000 uF	4,000 uF	3,000 uF	
Ripple & Noise (max.)					
100mVp-p	100mVp-p	100mVp-p	200mVp-p	200mVp-p	
Efficiency (typ.)					
89%	91.5%	91.5%	91.5%	91.5%	
Hold-up Time					
25 ms min.					
Switching Frequency					
100 kHz					
Protection	Over Power Protection				
	Auto recovery				
	Over Voltage Protection				
	Auto recovery				
Overt Temperature Protection					
Auto recovery					
Short Circuit Protection					
Auto recovery					
Isolation	Input-Output (V.AC)				
	3750V				
	Input-FG (V.AC)				
1880V					
Output-FG (V.AC)					
500V					
Environment	Operating Temperature				
	-25°C...+70°C (with derating)				
	Storage Temperature				
	-40°C...+85°C				
	Temperature Coefficient				
	±0.02%/°C ( 0~50°C )				
Humidity					
95% RH					
MTBF					
>100,000 h @ 25°C (MIL-HDBK-217F)					
Vibration					
10~500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes.					
Physical	Dimension (L x W x H)				
	6.44 x 2.79 x 1.50 Inches (163.7 x 71.0 x 38.0 mm ) Tolerance ±0.5 mm				
	Weight				
635 g					
Cooling Method					
Free air convection					
Safety	Agency Approvals				
EN61347-1:2008 、 EN61347-2-13:2006					
EMC	EMI (Conducted & Radiated Emission)				
	Design refer to EN 55015 、 Class B				
EMS (Noise Immunity)					
Design refer to EN 61547					

1. All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

2. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.

## MECHANICAL DIMENSION ( Top View )


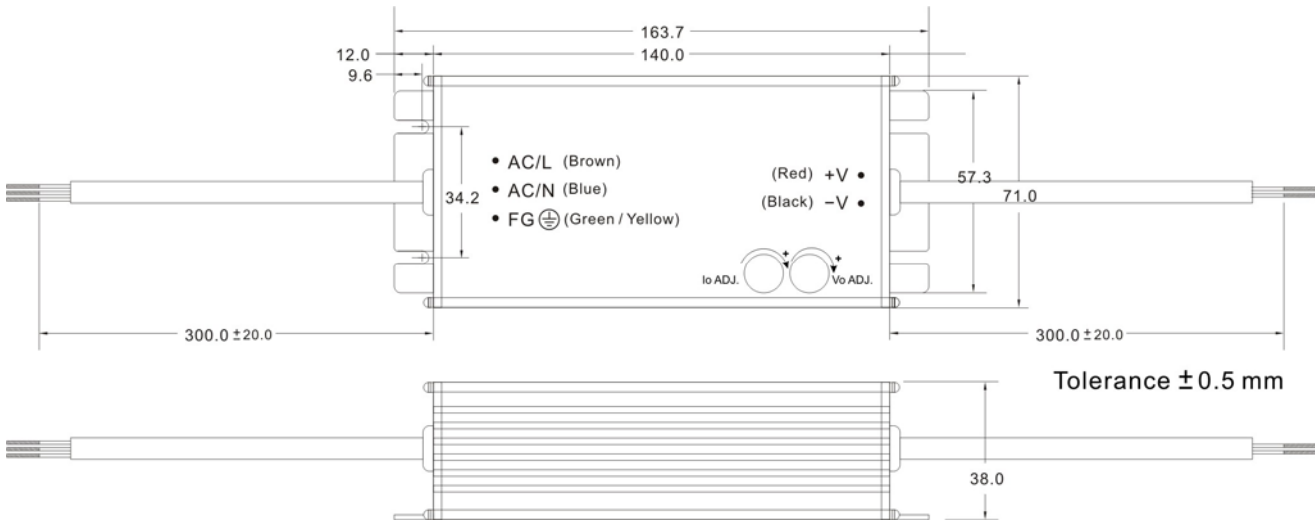


## ASSEMBLY INSTRUCTIONS


\*U Case T=2.5mm

Customer screws into the length of the case no higher than 0.5mm  
(Namely screw length for load plate thickness plus 3.0mm)

## DERATING

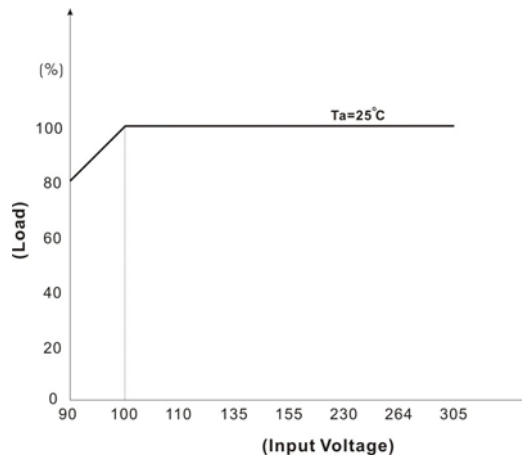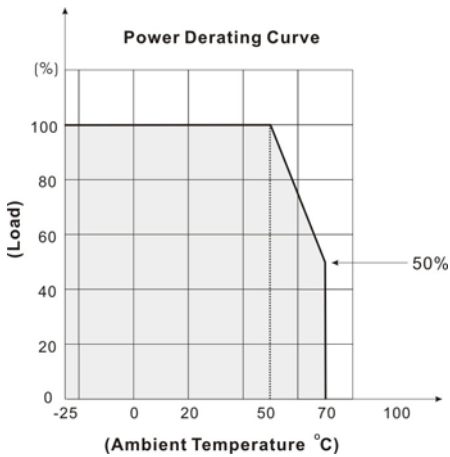

## BLOCK DIAGRAM

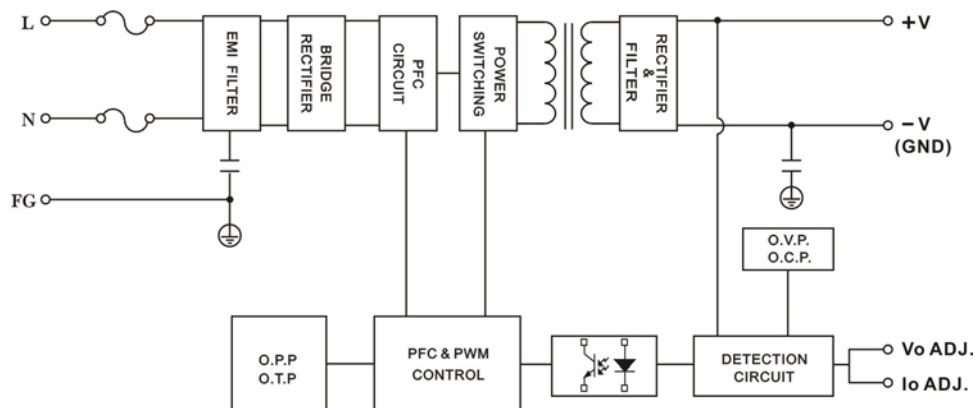


## EFFICIENCY VERSUS LOAD

### ALF100-12S


VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	86.70	88.61	90.36	90.61	90.36
Input Voltage (V)	277	305			
Efficiency (%)	90.36	90.36			

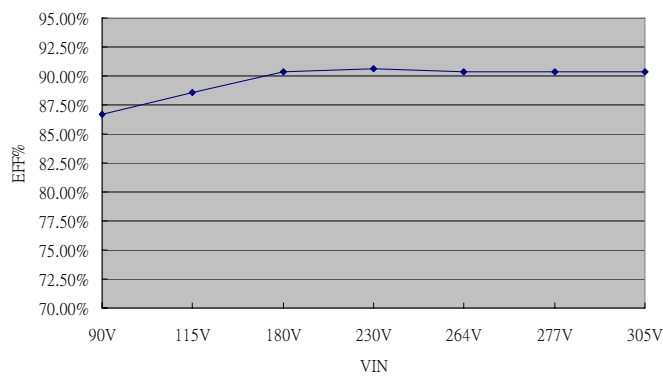

LOAD VS Efficiency


Load (%)	0	10	20	30	40	50
115V (%)	0	78.83	82.61	86.10	87.62	88.25
230V (%)	0	67.92	78.75	83.11	86.31	88.09
Load (%)	60	70	80	90	100	
115V (%)	88.58	88.54	88.62	88.57	88.51	
230V (%)	89.24	89.71	89.91	90.25	90.61	

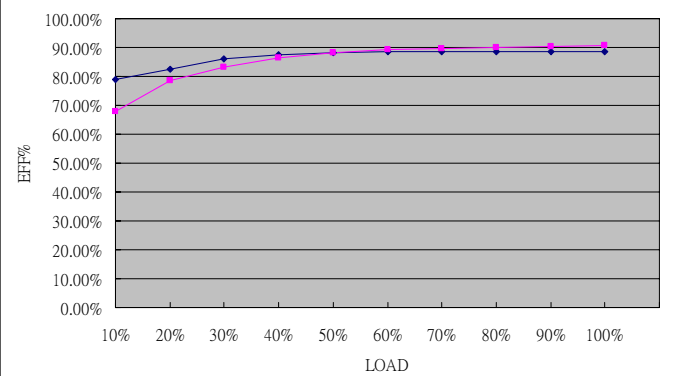

### ALF100-24S


VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	88.71	90.65	92.27	92.27	92.14
Input Voltage (V)	277	305			
Efficiency (%)	92.14	92.40			

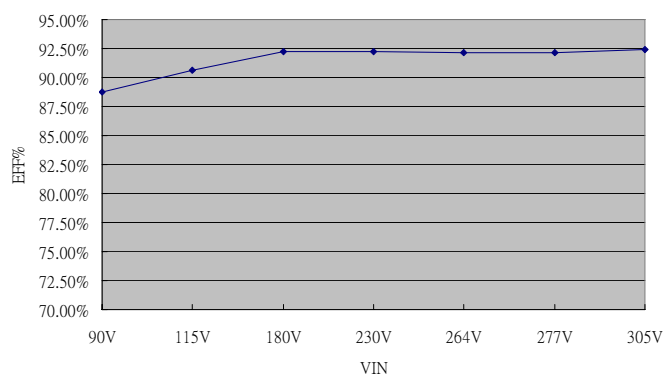

LOAD VS Efficiency

Load (%)	0	10	20	30	40	50
115V (%)	0	71.91	82.20	86.04	87.80	88.81
230V (%)	0	65.13	76.60	82.51	85.92	87.91
Load (%)	60	70	80	90	100	
115V (%)	89.54	90.26	90.12	90.34	90.43	
230V (%)	89.28	90.61	91.47	92.20	92.31	

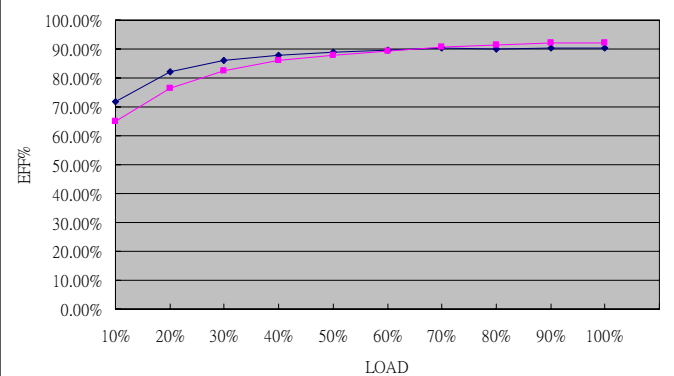


## EFFICIENCY VERSUS LOAD

### ALF100-36S


VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	88.82	90.67	92.10	92.01	91.42
Input Voltage (V)	277	305			
Efficiency (%)	91.36	91.53			

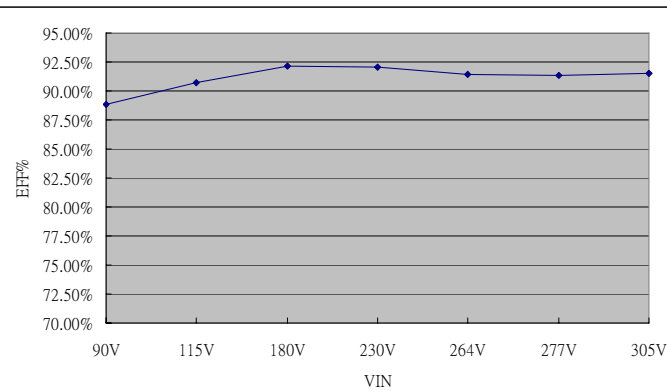

LOAD VS Efficiency


Load (%)	0	10	20	30	40	50
115V (%)	0	73.59	82.19	85.65	87.60	89.01
230V (%)	0	65.58	76.12	81.72	85.42	87.77
Load (%)	60	70	80	90	100	
115V (%)	89.29	90.38	90.80	90.97	90.89	
230V (%)	88.78	89.89	91.24	91.68	92.43	

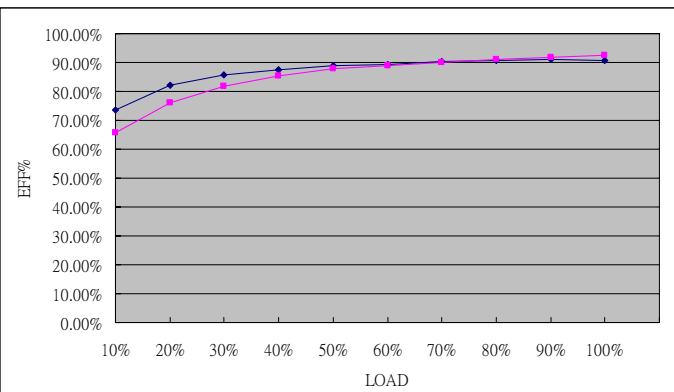

### ALF100-48S


VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	89.15	90.83	92.09	92.01	91.42
Input Voltage (V)	277	305			
Efficiency (%)	91.25	91.25			

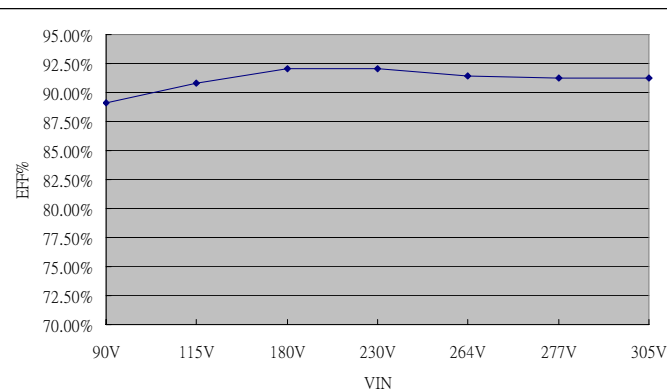

LOAD VS Efficiency

Load (%)	0	10	20	30	40	50
115V (%)	0	71.89	81.99	85.76	87.48	88.59
230V (%)	0	61.76	75.28	80.88	84.90	87.04
Load (%)	60	70	80	90	100	
115V (%)	89.48	90.16	90.40	90.73	90.85	
230V (%)	88.77	89.95	90.66	91.27	92.01	

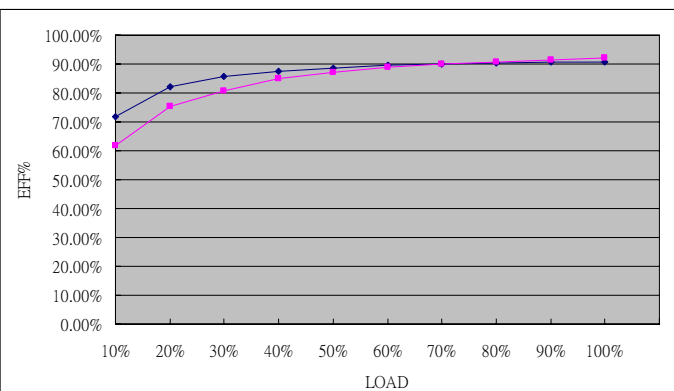


## EFFICIENCY VERSUS LOAD

### ALF100-54S

VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	89.11	91.04	92.56	92.82	92.73
Input Voltage (V)	277	305			
Efficiency (%)	92.58	92.22			

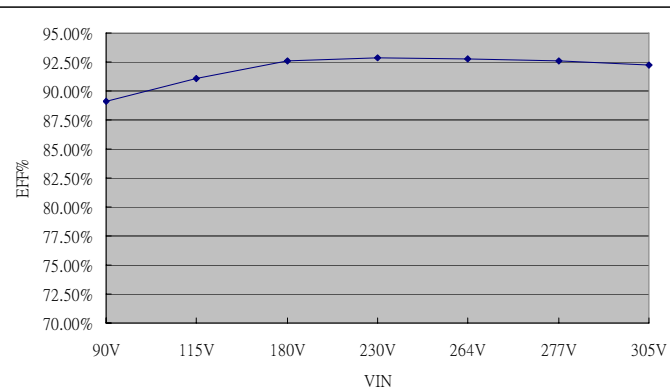

LOAD VS Efficiency

Load (%)	0	10	20	30	40	50
115V (%)	0	67.86	77.81	84.01	86.71	88.96
230V (%)	0	58.78	73.10	81.29	84.94	87.15
Load (%)	60	70	80	90	100	
115V (%)	89.80	90.32	90.75	91.12	91.04	
230V (%)	89.06	90.30	91.60	92.93	92.82	

