

FUNCTION


For use as decoupling diodes on the output of DC power supplies and chargers

MODEL	A	V _{max}	Heatsink mm)	Comments
IOD1-50A-60V-C	50	60	Wall mount	147W x 177D x 62H mm *(excluding mounting feet)
IOD2-50A-60V-C	50	60	Wall mount	150W x 242D x 62H mm *(excluding mounting feet)
IOD2-50A-200V-C	50A	200	Wall Mount	150W x 242D x 62H mm *(excluding mounting feet)
IOD2-50A-60V-C-R	50	- 60	Wall mount	150W x 242D x 62H mm *(excluding mounting feet)

IOD1-50A-60V-C



IOD2-50A-60V-C , IOD2-50A-200V-C

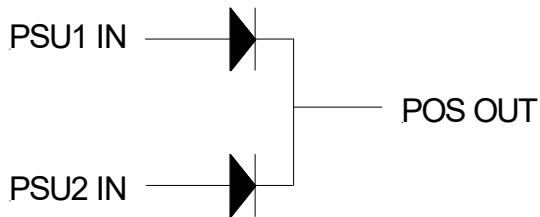

IOD2-50A-60V-R

